


A SCHEMATIC PICTURE OF BLX-T FeAl

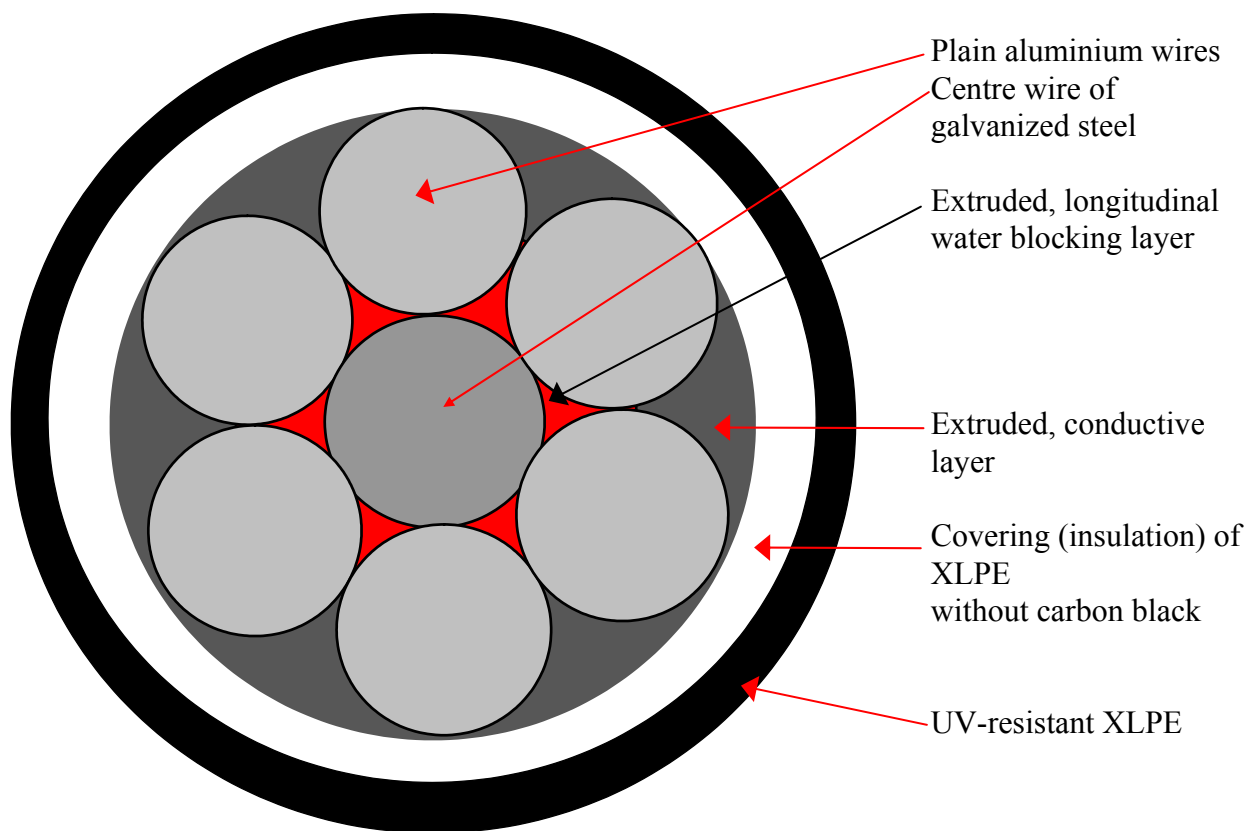

Delivery lengths and weights

Designation acc. to SS 424 14 63 Proposal 3	E-Number	Standard length m/drum	Standard drum size	Weight incl drum tot kg	Length without joint m/drum	Aluminium weight conductor kg/km
BLX-T 62 FeAl	E-0620072	1500	K12	550	5400	146
BLX-T 99 FeAl	E-0620122	1000	K11	500	4200	232

Dimensions

Designation acc. to SS 424 14 63 Proposal 3	Strand design acc. to SS 424 08 07 wire dia., mm	Thickness of covering nominal mm	Thickness of covering minimum mm	Diam. over covering minimum mm	Diam. over covering maximum mm
BLX-T 62 FeAl	3,37	2,3	2,0	15,1	16,3
BLX-T 99 FeAl	4,25	2,3	2,0	17,8	19,0

Temperatures

	Kontinuerlig Temperatur (°C)	Kortslutnings Temperatur (°C)
BLX-T	90	250
BLL-T	70	200